



## MARINE GENERATORS

# 30 GTA/GTAC 240V TAC ELECTRONIC GOVERNOR

Three-Phase

### General data

<b>Maximum power*</b>	23.76 kW (29.7 kVA)	<b>Voltage</b>	240 V
<b>Prime Power**</b>	21.6 kW	<b>Amperage</b>	71.45 A
<b>Frequency</b>	60 Hz	<b>Phases</b>	3

### Dimensions and weights

<b>Total length without canopy</b>	1140 mm	<b>Total length with canopy</b>	1310 mm
<b>Total width without canopy</b>	610 mm	<b>Total width with canopy</b>	610 mm
<b>Total height without canopy</b>	662 mm	<b>Total height with canopy</b>	698 mm
<b>Dry weight without canopy</b>	351 Kg	<b>Dry weight with canopy</b>	412 Kg

### Engine

<b>Base engine manufacturer</b>	Mitsubishi	<b>Diameter</b>	88 mm (3.46 in)
<b>Model</b>	MINI-63	<b>Stroke</b>	103 mm (4.06 in)
<b>Type</b>	Diesel, 4 stroke	<b>Compression ratio</b>	22:1
<b>Engine RPM</b>	1800	<b>Injection system</b>	Mechanical and indirect
<b>Number of cylinders</b>	4	<b>Intake system</b>	Naturally aspirated
<b>Total displacement</b>	2505 cc	<b>SAE Flywheel housing</b>	SAE 4
<b>Oil</b>	SAE 15W40	<b>Coolant capacity</b>	9.5 L (2.51 gal)
<b>Oil capacity</b>	6.5 L (1.72 gal)	<b>Flywheel</b>	SAE 7 1/2
<b>Power</b>	25.5 kW (34.68 CV)	<b>Coolant flow rate</b>	52 l/min (13.74 gal/m)
<b>Salt water flow rate</b>	38 l/min (10.04 gal/m)	<b>Intake air flow rate</b>	1.65 m <sup>3</sup> /m
<b>Exhaust type</b>	Wet exhaust elbow	<b>V-Belt Protection</b>	Included

Rating conditions according to ISO 3046 (100 kPa barometric pressure, 30 % relative humidity abd 25 °C (77 ° F))

\* Maximum output power: maximum power supplied by the genset at full load

\*\* Prime Power: rated power according to ISO 3046 and ISO 8528-1. 10 % overload capacity one hour in twelve hours.

Fuel system details

1 kW □ 1,36 CV 1 kW □ 1,36 HP (metric) 1 kW □ 1,36 CH

45611 - 11/24

## Fuel system details

<b>Consumption 25%</b>	2.8 l/h (0.74 gal)	<b>Fuel type</b>	Diesel
<b>Consumption 50%</b>	4 l/h (1.06 gal)	<b>Fuel standards</b>	Fueloil diesel ASTM
<b>Consumption 75%</b>	5.4 l/h (1.43 gal)	<b>Injection pump type</b>	In line
<b>Consumption 100%</b>	7.3 l/h (1.93 gal)	<b>Governor type</b>	Mechanical

## Electrical system

<b>Battery voltage</b>	12 V	<b>Stop solenoid type</b>	ETR
<b>Starter motor</b>	2 kW	<b>Alternator</b>	50 A
<b>Earth isolated</b>	Included	<b>IP 65 box kit</b>	Optional
<b>SCO 11 double panel</b>	Optional	<b>Current transformers</b>	Optional

## Installation details

<b>Exhaust hose inner diameter</b>	60 mm (2.36 in)	<b>Maximum fuel lift height</b>	0.6 m (1.97 ft)
<b>Sea water hose inner diameter</b>	32 mm (1.26 in)	<b>Maximum raw water lift height</b>	3 m (118.11 in)
<b>Fuel feeding hose inner diameter</b>	G1/8	<b>Maximum sea water temperature</b>	32 ° (89.6 °F)
<b>Fuel return hose inner diameter</b>	-	<b>Maximum installation angle***</b>	15 °
<b>Minimum battery capacity</b>	12 V 95 Ah		

## Alternator details

<b>Brand</b>	Sincro	<b>Cos Phi</b>	0,8
<b>Model</b>	SK 160 LB	<b>Tropicalized</b>	No
<b>Regulator type</b>	BL4	<b>Excitation system</b>	Brushless
<b>Number of poles</b>	4	<b>Voltage regulation accuracy**</b>	1%
<b>Isolation type*</b>	H	<b>Alternator type</b>	Synchronous
<b>IP protection</b>	23	<b>Standards</b>	EN 60034-1, IEC 60034-1, ISO 8528-3

## Standard equipment

Earth isolated	V-Belt Protection
Double wall injection pipes and fuel leak alarm	Spray stop kit
Dual fuel filter	Sensors certified by the rating company
CO-40 panel for engine/primer mover	Reinforced bed and silentblocks
Electronic regulator	6 m wiring extension
Electronic actuator	Packaging
Documentation: manual, test, declaration of conformity	Oil extraction pump

## Optional accessories

Siphon break kit mandatory if generator is below waterline	Exhaust System
Engine electrical system at 24 V	Keel Cooling conversion for dry and wet exhaust
Service/Cruise Kits: fuel and oil filters, raw water pump, impeller, alternator belt,...	Exhaust Hose
Dry Exhaust system	Water Filters

\* Other protections available

\*\* With load from 0 to 100%, speed variation from -2% up to +5%, power factor 0,8 linear and balanced load.

\*\*\* In all directions

For other requirements please contact the Sales Dept.

# COMAP PANEL CO 40



## General Description

Control, monitoring and protection for marine engines  
(signal alternator not included)  
For Emergency, Auxiliary, Harbor and Propulsion engines  
Redundant module ID-RPU with hardwired safety  
functions activated in backup mode  
Switching between primary and secondary battery  
(with ID-RPU module)  
Connection to engine via primary J1939 and backup J1587 buses  
Event driven History record  
14 binary inputs, 14 binary outputs, 8 analog inputs  
Slave panels for remote control  
Type approval from major certification societies  
Configuration protected by password  
Running hour indication  
Multilanguage  
D+ pre-excitation Terminal

## Alarm Management

1 Emergency stop input  
5 Shutdown inputs  
1 RPM input  
Common warning and common shutdown output terminals  
Stop solenoid, fuel solenoid outputs  
Redundant power supply  
I/O broken wire detection

## Optional Equipment

Power supply: Nominal power supply 24 VDC

Power supply range 6 - 36 VDC

Current consumption (depends on supply voltage)

0,34 A at 8 VDC 0,12 A at 24 VDC 0,09 A at 36 VDC

Battery voltage measurement tolerance 2% at 24 V

RTC battery life-cycle 10 year

Operating temperature -10 to +70 °C

Storage temperature -30 to +80 °C

Humidity 95% Without condensation

## Alternator Measurements

180 x 120 mm front panel mounted case

Weight 800g

Graphic black-lit LCD display 128x64 pixel resolution with icons  
and bar graphs

LED status indicators / Lamp test

Protection front panel IP65

## Extension

Oil Pressure (bar)

Oil Temperature (°C)

Coolant Temperature (°C)

Coolant Pressure (bar)

Battery Voltage (V)

RPM

History log

## Intelligen200 Panel Features

High coolant temperature

High oil temperature

Fuel leakages

Low oil pressure

Low coolant pressure

Overspeed

Emergency stop

Low battery voltage

Maintenance request

Sensor Fails (FLS)

Flash memory data retention time 10 years

Standard Conformity

Low Voltage Directive

EN 61010-1:95 +A1:97





Electromagnetic Compatibility

EN 61000-6-2, October 2001

EN 61000-6-4, October 2001

IEC 60533, Ed. 2; 1999-11

## Dimensions

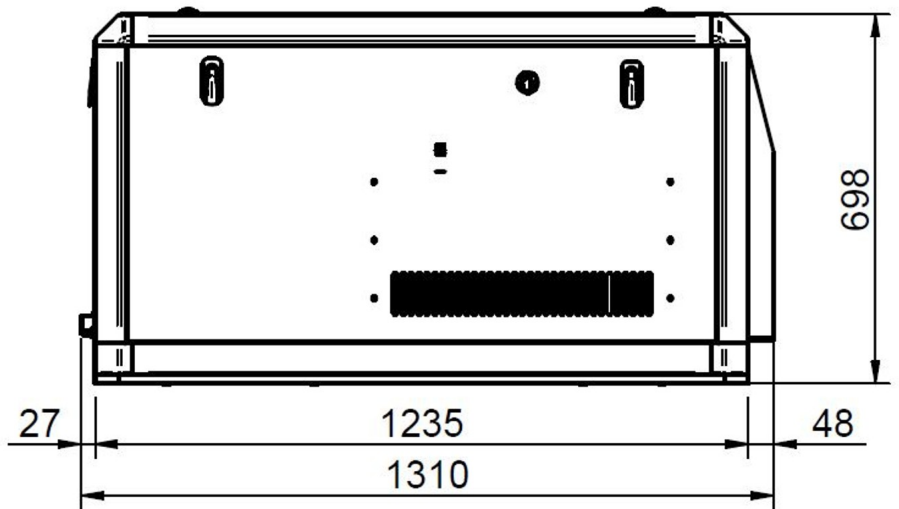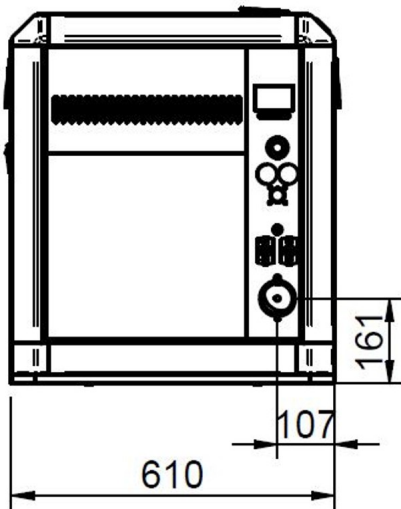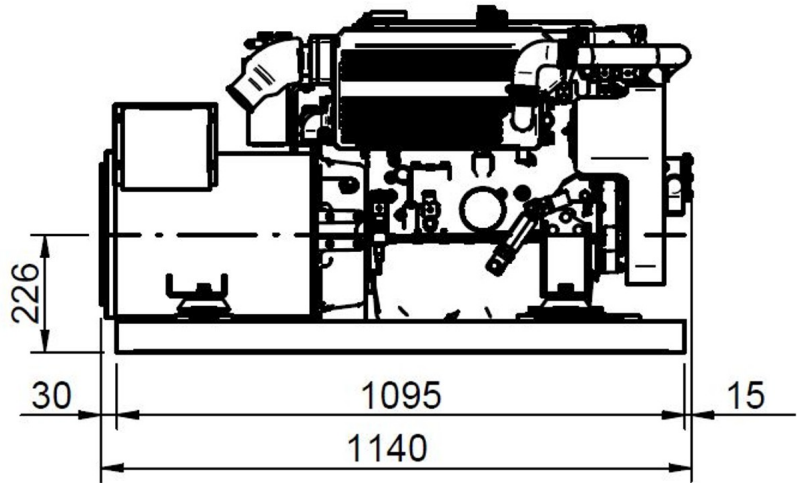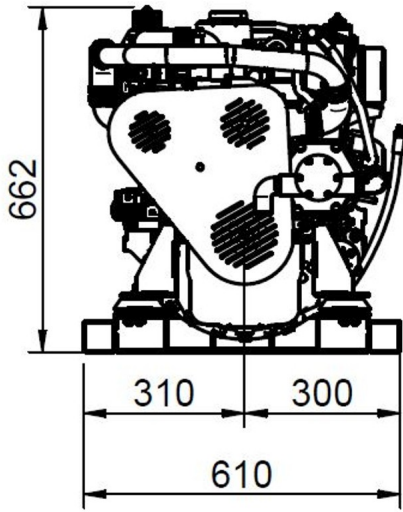

Detailed drawings, brochures and manuals are available on the web [soleadvance.com](http://soleadvance.com). All rights reserved.  
 Technical specifications, data and presentation are subjected to variations, changes and updates without prior notice.  
 Non-contractual information.



Authorized dealer